

Pneumatic Valve

PRODUCT CATALOGUE

PRODUCT CATALOGUE

3PCS Female Thread Pneumatic Ball Valve

Specifications

- 【Size Range】 DN10 to DN100, 3/8" to 4"
- 【Operating Pressure】 1.6 to 6.4MPa
- 【Body Materials】 Stainless Steel, WCB
- 【Core Materials】 Stainless Steel
- 【Sealing Materials】 NBR, EPDM, FKM (VITON), PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Tri-Clamp Pneumatic Ball Valve

Specifications

- 【Size Range】 DN10 to DN100, 3/8" to 4"
- 【Operating Pressure】 1.6 to 6.4MPa
- 【Body Materials】 WCB, Stainless Steel
- 【Core Materials】 WCB, Stainless Steel
- 【Sealing Materials】 PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Pneumatic Three-Piece Welded Ball Valve

Specifications

- 【Size Range】 DN08-DN100
- 【Operating Pressure】 PN1.0, 2.5, 4.0, 6.4, 31.5MPa
- 【Body Materials】 304, 316, 316L
- 【Core Materials】 304, 316, 316L
- 【Sealing Materials】 PTFE
- 【Control Mode】 ON/OFF Type, Modulating Type



PRODUCT CATALOGUE

2 Way Tri-Clamp Pneumatic Ball Valve

Specifications

- 【Size Range】 DN15 to DN150, 1/2" to 6"
- 【Operating Pressure】 1.6 to 6.4MPa
- 【Body Materials】 Stainless Steel
- 【Disc Materials】 Stainless Steel
- 【Sealing Materials】 EPDM, Silicone Rubber
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



3 Way Sanitary Pneumatic Ball Valve

Specifications

- 【Size Range】 DN15 to DN150, 1/2" to 6"
- 【Operating Pressure】 1.6 to 6.4MPa
- 【Body Materials】 Stainless Steel
- 【Disc Materials】 Stainless Steel
- 【Sealing Materials】 EPDM, Silicone Rubber
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Pneumatic Flanged Ball Valve

Specifications

- 【Size Range】 DN15 to DN250, 1/2" to 10"
- 【Operating Pressure】 1.0 to 6.4MPa
- 【Body Materials】 WCB, Stainless Steel
- 【Core Materials】 WCB, Stainless Steel
- 【Stem Materials】 WCB, Stainless Steel
- 【Sealing Materials】 PTFE (TEFLON), Stainless Steel
- 【Control Mode】 ON/OFF Type, Modulating Type




PRODUCT CATALOGUE

3 Way Pneumatic Flanged Ball Valve

Specifications

- 【Size Range】 DN15 to DN250, 1/2" to 10"
- 【Operating Pressure】 1.6 to 6.4MPa
- 【Body Materials】 WCB, Stainless Steel
- 【Core Materials】 WCB, Stainless Steel
- 【Sealing Materials】 PTFE (TEFLON), Stainless Steel
- 【Structure】 3 Way T Port, L Port are Available
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)

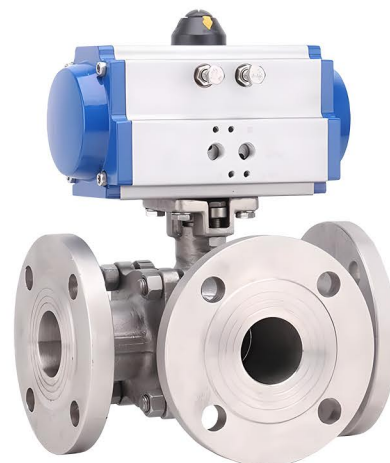

High Pressure Pneumatic 2Way Ball Valve

Specifications

- 【Size Range】 DN08 to DN50, 1/4" to 2"
- 【Operating Pressure】 10.0 to 40.0MPa
- 【Body Materials】 Stainless Steel
- 【Core Materials】 Stainless Steel
- 【Sealing Materials】 PTFE
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



High Pressure Pneumatic 3Way Ball Valve

Specifications

- 【Size Range】 DN08 to DN50, 1/4" to 2"
- 【Operating Pressure】 10.0 to 40.0MPa
- 【Body Materials】 Stainless Steel
- 【Core Materials】 Stainless Steel
- 【Sealing Materials】 PTFE
- 【Structure】 3 Way T Port, L Port are Available
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



PRODUCT CATALOGUE

Plastic 2 Way Pneumatic Ball Valve

Specifications

- 【Size Range】 DN15 to DN100, 1/2" to 4"
- 【Operating Pressure】 1.0MPa
- 【Body Materials】 CPVC, UPVC
- 【Disc Materials】 CPVC, UPVC
- 【Sealing Materials】 PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Plastic 3 Way Pneumatic Ball Valve

Specifications

- 【Size Range】 DN15 to DN50, 1/2" to 2"
- 【Operating Pressure】 1.0MPa
- 【Body Materials】 CPVC, UPVC
- 【Disc Materials】 CPVC, UPVC
- 【Sealing Materials】 PTFE (TEFLON)
- 【Structure】 3 Way T Port, L Port are Available
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Plastic Pneumatic Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN300, 2" to 12"
- 【Operating Pressure】 1.0MPa
- 【Body Materials】 CPVC, UPVC
- 【Disc Materials】 CPVC, UPVC
- 【Sealing Materials】 PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



PRODUCT CATALOGUE

Cast Iron Pneumatic Wafer Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN600, 2" to 24"
- 【Operating Pressure】 1.0 to 1.6MPa
- 【Body Materials】 Cast Iron, Ductile Iron, Stainless Steel
- 【Disc Materials】 Cast Iron, Stainless Steel
- 【Sealing Materials】 NBR, EPDM, FKM (VITON), PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Cast Iron Pneumatic Lug Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN600, 2" to 24"
- 【Operating Pressure】 1.0 to 1.6MPa
- 【Body Materials】 Cast Iron, Ductile Iron, Stainless Steel
- 【Disc Materials】 Cast Iron, Stainless Steel
- 【Sealing Materials】 NBR, EPDM, FKM (VITON), PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Stainless Steel Pneumatic Wafer Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN600, 2" to 24"
- 【Operating Pressure】 1.0 to 1.6MPa
- 【Body Materials】 Cast Iron, Ductile Iron, Stainless Steel
- 【Disc Materials】 Cast Iron, Stainless Steel
- 【Sealing Materials】 NBR, EPDM, FKM (VITON), PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



PRODUCT CATALOGUE

Pneumatic Stainless Steel Lug Type Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN600, 2" to 24"
- 【Operating Pressure】 1.0 to 1.6MPa
- 【Body Materials】 Ductile Iron, Aluminum, Stainless Steel
- 【Disc Materials】 Stainless Steel
- 【Sealing Materials】 EPDM, PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Soft Sealed Pneumatic Flanged Butterfly Valve

Specifications

- 【Size Range】 DN50 to DN700, 2" to 28"
- 【Operating Pressure】 1.0 to 1.6MPa
- 【Body Materials】 Ductile Iron, WCB, Stainless Steel
- 【Disc Materials】 Cast Iron, Ductile Iron, WCB, Stainless Steel
- 【Stem Materials】 WCB, Stainless Steel
- 【Sealing Materials】 EPDM, PTFE (TEFLON)
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)



Pneumatic Sanitary Butterfly Valve

Specifications

- 【Size Range】 DN15 to DN150, 1/2" to 6"
- 【Operating Pressure】 0.6 to 1.6MPa
- 【Body Materials】 Stainless Steel
- 【Disc Materials】 Stainless Steel
- 【Sealing Materials】 EPDM, Silicone Rubber
- 【Acting Mode】 Double Acting, Single Acting (Spring Return)

